

Bit Time Calculations for the Microchip CAN

Setup Criteria

Oscillator Frequency	16,000 MHz
Target CAN Bus Baud Rate	500,000 kbps

Selected Options


BRP-1 (Baud Rate Prescaler)	0
Tq (Time Quanta)	125,000 ns
Number of Time Quanta	16
% Error of Target Baud Rate	0,0 %

Bit Timing Setup in Tq

Propagation Delay	1
Phase Segment 1	8
Phase Segment 2	6
Synchronization Jump Width (SJW)	2

Multiple bit sampling is off. Wakeup filter is off.

Bit Timing Diagram

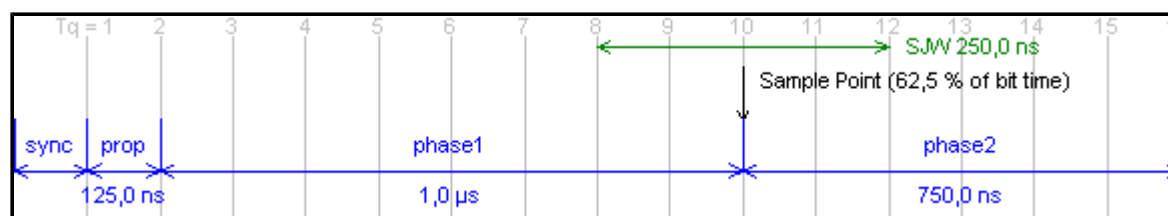

Configuration Register Setup (PIC18/MCP251X) (neoVI blue/green, ValueCAN 2)

Register	Binary	Hexadecimal
CNF1/BRGCON1	b'01000000'	0x40
CNF2/BRGCON2	b'10111000'	0xB8
CNF3/BRGCON3	b'00000101'	0x05

Configuration Register Setup (dsPIC33F,PIC24H,dsPIC30) (neoVI Red/Fire/Test/Yellow/ECU, ValueCAN 3)

Register	Binary	Hexadecimal
CICFG1	b'0000000001000000'	0x0040
CICFG2	b'0000010110111000'	0x05B8

Generated 7:47:54 am 12/11/2007

Microchip CAN Bit Timing Calculator by Intrepid Control Systems, Inc. (www.intrepidcs.com)

